

# Utilization of Waste Plastic in Concrete and Its Application

Karan Yadav<sup>1</sup>, Satish Parihar<sup>2</sup>

<sup>1</sup> M. Tech. Scholar (CTM), Department of Civil Engineering, FET, Rama University Uttar Pradesh, Kanpur, U.P. India-209217

<sup>2</sup> Associate Professor, Department of Civil Engineering, FET, Rama University Uttar Pradesh, Kanpur, U.P. India-209217

**Abstract-** This research examined how incorporating recycled plastic materials influences concrete. Residential plastic waste was gathered. The majority of plastics cannot biodegrade. Up till they are cleaned up, they will remain in landfills. Dumping of plastic materials is a significant issue that we have since it leads to several issues. Plastic may be used in the construction industry to reduce plastic waste because it is an inorganic material and does not alter the chemical composition of concrete or have an impact on the consistency or quality of the concrete. Plastic can be used in concrete as a filler material and to enhance the mechanical qualities of concrete. Cement, water, fine aggregate, and coarse aggregate make up the composite substance known as concrete. W/C 0.35 was utilised to create high-strength concrete, and 10% of the cement, fine aggregate, and coarse aggregate were substituted with waste plastic. Cast cubes and cylinders with dimensions of 150mm in diameter and 300mm in length.

**Keyword:** Concrete, Plastic, Aggregate, Cement..

## I. INTRODUCTION

Plastics currently play a massive role in our daily lives. Plastics are utilized in virtually all areas of manufacturing. Tons and tons of plastic products are melted on a daily basis, even as the waste continues to build up. Due to the fact that most plastics are not biodegradable, an enormous sum of plastic waste continues to build up worldwide, with industrialized nations contributing the largest amount of plastic waste. More specifically, the majority of plastic waste comes from packaging and containers. The amount of land required for landfills is of increasing concern everywhere in the world. From the 1950 up to 2018, an estimated 6.3 billion tons of plastic has been produced worldwide, of which an estimated 9% has been recycled and another 12% has been incinerated. India alone, produces more than 5 million tons of plastic are consumed each year, of which only an estimated one-quarter is recycled, with the remainder going to landfills. This large amount of plastic waste inevitably enters the environment, with studies suggesting that the bodies of 90% of seabirds contain plastic debris.

Khilesh (2014) studied the impact of use of plastic waste and steel fiber addition on the properties of concrete. The fine aggregate was replaced by plastic waste at 0.2%, 0.4%, 0.6%, 0.8% and 1% by weight of cement and 0.1%, 0.2%, 0.3% 0.4% and 0.5% steel fibers were incorporated in concrete mixes. They observed that, replacement of fine aggregate by plastic waste in different percentages showed an increase in compressive strength whereas marginal reduction in slump as compared to that of control mix [10].

Subramani and Pugal (2015) reported that, the use of plastic waste as a replacement for conventional coarse aggregate improves the physical and mechanical properties of concrete mixes. It was reported that, the compressive strength, flexural strength and split tensile strength of concrete was increased by 8%, 5% and 3% as compared to that of control concrete at 15% replacement level. As the percentage of replacement increased beyond 15% all the properties of concrete showed downward trend. This fact was due to excess presence of water in the concrete mix because plastic waste has very low water absorption as compared to that of conventional coarse aggregate [15]. Harini and Ramana (2015) studied the influence of replacement of plastic waste and silica fume as fine aggregate and cement respectively in concrete mixes. The plastic waste was replaced in the percentage 5%, 6%, 8%, 10%, 15%, 20% by volume and silica fume 5%, 10%, 15% by weight in concrete. They reported that, the degree of workability was high in all the replacement levels. It was also stated that, in all the replacement levels of plastic waste as fine aggregate showed marginal reduction approximately 10% in compressive strength as compared to that of control mix. In case of silica fume replacement the compressive strength of concrete mixes increased by 13%, 20% and 23% at 5%, 10% and 15% respectively. Tensile strength of concrete reduced marginally at 8% to 20% replacement and increased marginally at 5% and 6% replacement levels as compared to that of control mix [11]. One of the main goals of sustainable solid waste management is to maximize the ability of its recycling and reusing. The modern lifestyle, alongside the advancement of technology has led to an increase in the amount and type of waste being generated, leading to a waste disposal crisis (Jaivignesh and Sofi, 2017) [22].

### 1.1 Materials used and their properties Cement

Ordinary Portland Cement (43 Grade) with 29 percent normal consistency conforming to IS: 8112-1989 was used. The specific gravity and fineness modulus of cement are 3.15. Fine Aggregate- The properties of sand by conducting tests according with IS 2386 (part-1)-1963. Coarse Aggregate - Crushed stone coarse aggregate conforming to IS 383 - 1987 was used. The values of loose and compacted bulk density values of coarse aggregates were 1600 and 1781 Kg/m<sup>3</sup>. Water - Water is an important ingredient of concrete as it actively participates in chemical reactions with cement. Clean potable water conforming to

IS 456 – 2000 was used for the preparation of concrete mixture.

**1.2 Mix Details**

The concrete mix has been designed for M20 grade as per IS 10262 – 2009.

Volume of concrete required for a cube of 150 x 150 x 150 mm mould = 0.003m<sup>3</sup>, Quantity of cement, Fine aggregate and Coarse aggregate is 1.47 kg, 1.47 kg, 2.94 kg.

Volume of concrete required for a cylinder = 0.005 m<sup>3</sup>, Quantity of cement, Fine aggregate and Coarse aggregate is 2.45 kg, 2.45 kg, 4.9 kg

**II. BASICS OF PLASTIC MANUFACTURING**

The term “plastic” includes materials composed of various elements such as carbon, hydrogen, oxygen, nitrogen, chlorine and sulfur. Plastics typically have high molecular weight; meaning can have thousands of atoms bound together. Most plastics are based on the carbon atom. Silicones, which are based on silicon atom, are an exception. The carbon atom can link to other atoms with up to four chemical bonds. When all of the bonds are to other carbon atoms, diamonds or graphite or carbon black may result. For plastics the carbon atoms are also connected to hydrogen, oxygen, nitrogen, chlorine or sulfur. When the connections of atoms result in long chains, like pearls on a string of pearls, the polymer is called a thermoplastic. About 92% of plastics are thermoplastics. Some examples of material properties in plastic product applications are:

Hot-filled packaging used for products such as ketchup. Chemical-resistant packaging used for products such as bleach.

**2.1 Types of plastics based on processing**

**Thermo-set**

- ✚ **Polyurethanes:** Mattresses, Cushions, Insulation.
- ✚ **Epoxies:** Adhesive glues, Coating for electrical devices, Helicopter and jet engine blades.
- ✚ **Phenol Formaldehyde:** plywood, Electrical appliances, Electrical circuit boards and switches.

**Thermoplastics**

- ✚ Packaging, Electrical insulation, Milk and Water bottles, Packaging film, House Wrap, Agricultural film.
- ✚ Polypropylene: Carpet fibers, automotive bumpers, Microwave containers, External prostheses.
- ✚ Polyvinyl chloride (PVC): Floor and wall covering, Automobile instruments.

Figure 1.1 and 1.2, shows the application of plastics in different fields

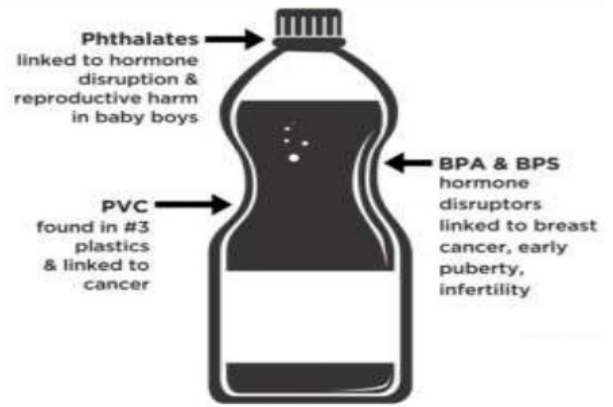


Figure 1.1 Plastic Bottle Chemicals

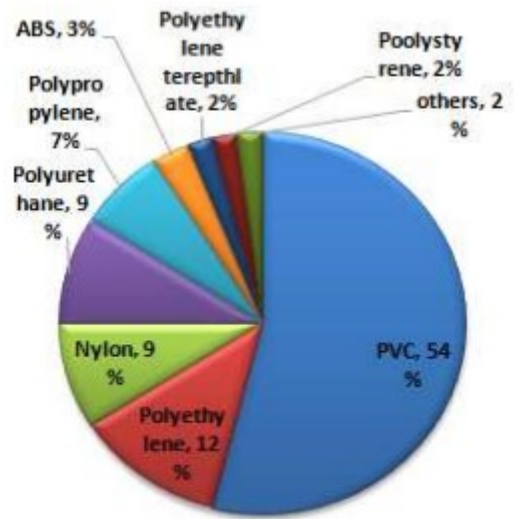


Figure 1.2 Plastics used in construction field

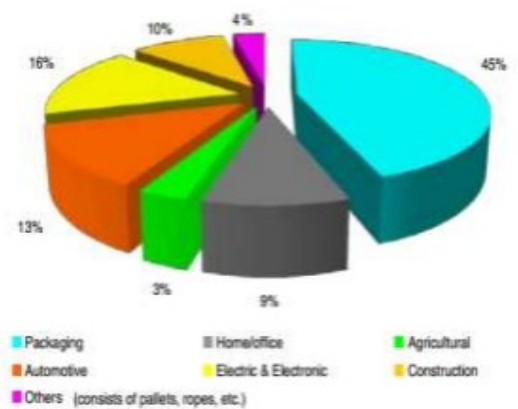


Figure 1.3 Plastics used in different fields

### 2.1 Test Methods

The density and consistency of fresh concrete was estimated according to standard methods. The compression strength and water absorbability of hardened concrete were established according to standard methods. The size of tested concrete specimens was 150×150×150 mm with the age of 28 days. test of fresh and hardened concrete were applied to control concrete and concrete with partly changed coarse aggregates to plastic waste Plastic carry bags are filled in empty water bottles and is compacted to remove the air in the container.



Figure 1.4 Waste Plastic compacted in bottles






Figure 1.5 Compression test on Concrete Cube



Figure 1.6 Split Tensile test on Concrete

### 2.2 Analysis

Analysis of Reinforced concrete beam in Ansys Shows the deflection of concrete beam with plastic ingredients.

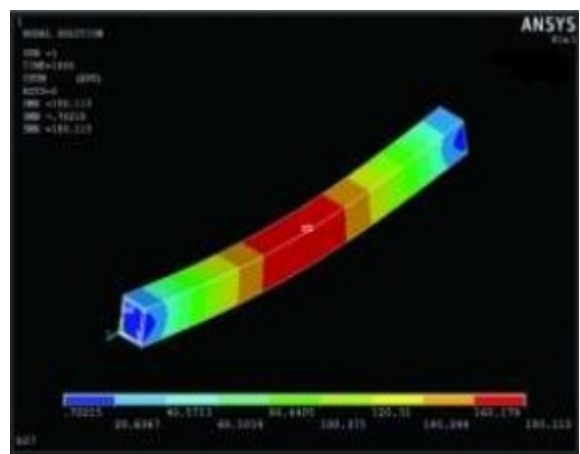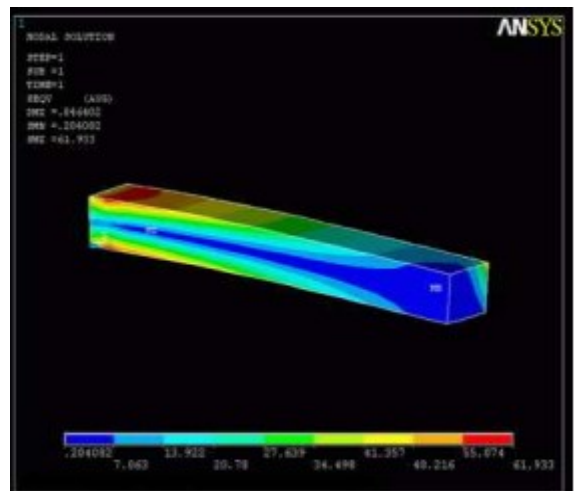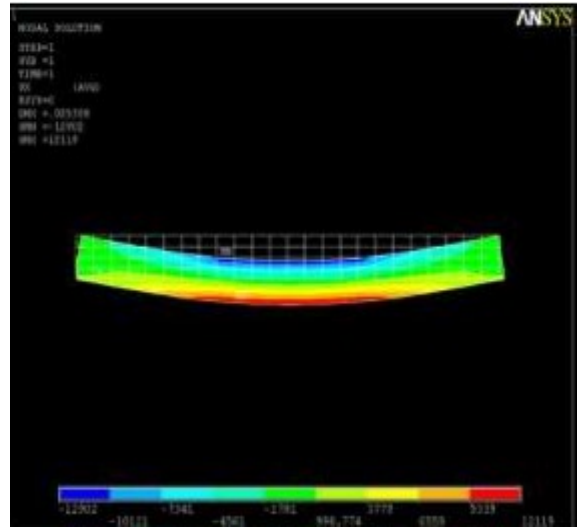

### III. RESULTS AND DISCUSSION

The compression test was conducted on the concrete cubes and beams is shown

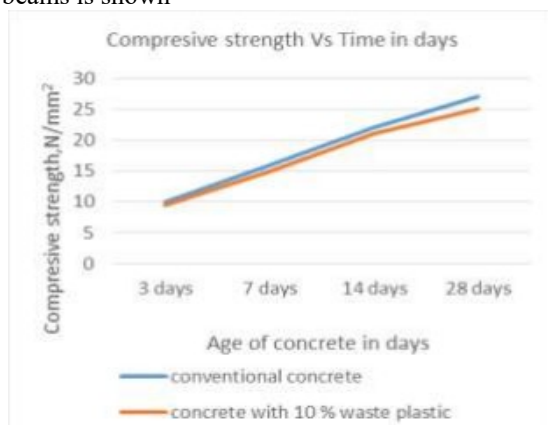


Figure 1.7 Compressive Strength

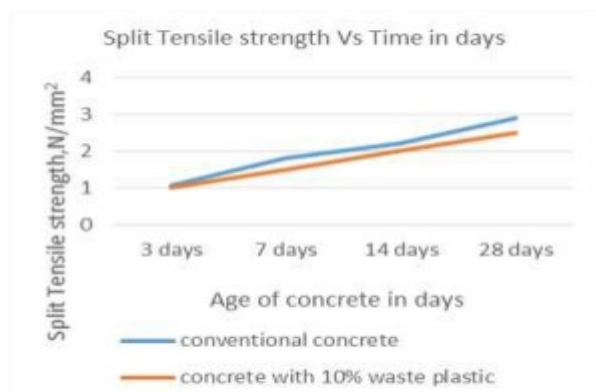


Figure 1.8: Split Tensile Strength

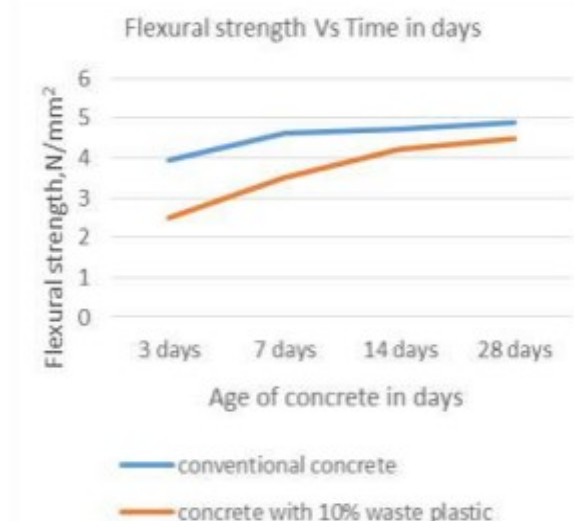


Figure 1.9 Flexural Strength

Compressive strength of the concrete reduced with increasing percentage of plastic replacement. The cube compressive strength of concrete at the age of 7 days resulted in marginal reduction with 10% replacement of

cement, Fine aggregate and Coarse aggregate. The split Tensile strength was reduced by 10% replacement of cement, Fine aggregate and Coarse aggregate when compared with conventional concrete. The strength of concrete decreased as the percentage of replacement of the conventional material increased. The reduction in compressive strength is less in comparison with the split tensile strength with the replacement of conventional material. The split tensile strength at the 7 and 14 days for the replacements of conventional material is marginal. The reduction in flexural strength of replacements at the age of 28 days is less when compared with early strength of concrete. The compressive strength, split tensile strength and flexural strength decreased with the percentage replacements of plastic waste increases at the age of 14 days. The compressive strength, split tensile strength and flexural strength of cement, Fine aggregate and Coarse aggregate decreased is very less and hence can be used less important work, utilizing the waste material which is produced in large quantities.

### IV. CONCLUSIONS

Cement is the most widely used construction material in the world and important product in concrete as compared to other. Based on the test results, the compressive strength for 3 days, 7days, 14 days and 28 days of 10% replacement is attained strength by 9.5 N/mm<sup>2</sup>, 15 N/mm<sup>2</sup>, 21 N/mm<sup>2</sup>, and 26 N/mm<sup>2</sup> respectively. The split tensile 3, 7, 14 and 28days of 10% replacement is raised 1.07 N/mm<sup>2</sup>, 1.5 N/mm<sup>2</sup>, 2 N/mm<sup>2</sup>, 2.5 N/mm<sup>2</sup>. That the flexural strength is gradually increased for 28days of 10% replacement is increased strength by 2.5 N/mm<sup>2</sup>, 3.5 N/mm<sup>2</sup>, 4.2 N/mm<sup>2</sup>, 4.5 N/mm<sup>2</sup>. Detectable reductions in compressive strengths are observed with increasing the percentage of plastic. The percentage expansions of the specimens cast with partial replacement of plastic are within the permissible limits; hence the materials are safe for construction purpose. Use of plastic increases the strength and durability of concrete for construction.

### REFERENCES

- [1] UNEP, Converting waste plastics into a resource, "United Nations Environment Program Industry and Economics", Osaka/Shi, (2009).
- [2] A. Hassani, H. Ganjidoust, A. Maghanaki. "Use of plastic waste (poly-ethylene terephthalate) in asphalt concrete mixture as aggregate replacement". Waste Management & Research, Vol. 23, (2005), pp: 322-327.
- [3] O.Y. Marzouk, R.M. Dheilly and M. Queneudec. "Valorization of post-consumer waste plastic in cementitious concrete composites". Waste Management, Vol. 27 No. 2, (2007), pp: 310-318.
- [4] Z.Z. Ismail and E.A. AL-Hashmi. "Use of waste plastic in concrete mixture as aggregate replacement". Waste Management, Vol. 28 No. 11, (2008), pp: 2041-2047.
- [5] Y. Ghernouti, B. Rabehi, B. Safi and R. Chaid. "Use of recycled plastic bag waste in the concrete", Journal of International Scientific Publications, Vol. 8, (2009), pp: 480-487.
- [6] S.C. Kou, G. Lee, C.S. Poon and W.L Lai. "Properties of lightweight aggregate concrete prepared with PVC granules derived from scraped PVC pipes". Waste Management, Vol. 29 No. 2, (2009), pp: 621-628.

- [7] Z.Z. Ismail and E.A. AL-Hashmi. "Validation of using mixed iron and plastic wastes in concrete". In Second International Conference on Sustainable Construction Materials and Technologies. Ancona (2010), pp. 393-403.
- [8] M. RaghatateAtul. "Use of plastic in a concrete to improve its properties". International journal of advanced engineering research and studies, Vol. 1 No. 3, (2012), pp: 109-111.
- [9] P. Mathew, S. Varghese, T. Paul and E. Varghesh. "Recycled plastics as coarse aggregate for structural concrete". International Journal of Innovative Research in Science, Engineering and Technology, Vol. 2 No. 3, (2013), pp: 687-690.
- [10] S. Khilesh. "Study of Strength Property of Concrete Using Waste Plastics and Steel Fiber". International Journal of Engineering And Science, Vol. 3 No. 5, (2014), pp: 9-11.
- [11] B. Harini and K.V. Ramana. "Use of Recycled Plastic Waste as Partial Replacement for Fine Aggregate in Concrete". International Journal of Innovative Research in Science, Engineering and Technology, Vol. 4 No.9, (2015), pp: 8596-8603.
- [12] M.M. Ahmed and S.S Raju. "Use of Waste Plastic in the Production of Light Weight Concrete". International Journal & Magazine of Engineering, Technology, Management and Research, Vol. 2 No.2, (2015), pp: 365- 369.
- [13] S. Aravind and E. John. "Replacement of Fine Aggregate by Crumb Rubber and Plastic Fines". International Journal of Engineering Research & Technology (IJERT), Vol. 4 No.11, (2015), pp: 305-310.
- [14] C.C. Chen, N. Jaffe, M. Koppitz, W. Weimer, A. Polocoser . "Concrete mixture with plastic as fine aggregate". International Journal of Advances in Mechanical and Civil Engineering, Vol. 2 No.4, (2015), pp: 49-53.
- [15] T. Subramani, and V.K. Pugal. "Experimental Study On Plastic Waste As A Coarse Aggregate For Structural Concrete". International Journal of Application or Innovation in Engineering & Management (IJAIEM), Vol. 4 No. 5, (2015), pp:144-152.
- [16] S. Singh, R. Nagar, V. Agrawal, A. Rana and A. Tiwari. "Sustainable utilization of granite cutting waste in high strength concrete". Journal of Cleaner Production, Vol. 116 No. 1, (2016), pp: 223-235.
- [17] M. Guendouz, F. Debieb, O. Boukendakdji, E.H. Kadri, M. Bentchikou and H. Soualhi. "Use of plastic waste in sand concrete". J. Mater. Environ. Sci, Vol. 7 No. 2, (2016), pp: 382-389.
- [18] M.J. Islam, M.S. Meherier and A.R. Islam. "Effects of waste PET as coarse aggregate on the fresh and harden properties of concrete". Construction and Building Materials, Vol. 125, (2016). Pp: 946-951.
- [19] M.A. Jibrael and F. Peter. Strength and Behavior of Concrete Contains Waste Plastic. Journal of Ecosystem & Ecography, 6(2)-2016, 2-5.
- [20] M. Mahesh. "Re-Use of Polyethylene Plastic Waste In Concrete". International Journal of Engineering Development and Research, Vol. 4 No.4, (2016), pp: 693-702.
- [21] K. Gaur, A.K. Arya, A. Jyotsana and N.K. Singh, N.K. "Use of Plastic as Partial Replacement of Fine Aggregate in Fibre Reinforced Concrete". IOSR Journal of Mechanical and Civil Engineering, Vol. 14 No.3, (2017), pp: 71-74.
- [22] B. Jaivignesh and A. Sofi. "Study on Mechanical Properties of Concrete Using Plastic Waste as an Aggregate". In IOP Conference Series: Earth and Environmental Science, Vol. 80 No.1, (2017), pp-12-16.